


WeatherWeld
SEAMLESS COMPOSITE ROOFING



Project, 150,000 square feet of BUR set in hot asphalt, mechanically attached to a plywood deck. Building is used to manufacture vitamins...must be kept very clean!



Since a tear-off was not an option, and VOC's, odors and dust were a major concern, the facility's management team selected the WeatherWeld Seamless Composite System.

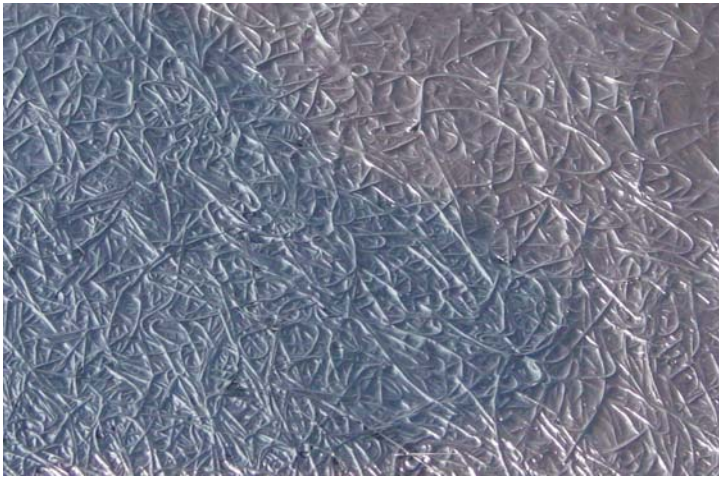

2.2 miles of fiberglass reinforcement, encapsulated in the WeatherWeld 121 asphalt emulsion, is contained in every square foot of the seamless composite membrane.



Upon drying, a highly reflective asphalt aluminum coating is applied.



This finished WeatherWeld Seamless Composite membrane has 1.5 times the amount of reinforcement of a 4 ply BUR; over twice the thickness of a single ply, and 10 times the tear strength of a polyester and emulsion system!



At the final job walk, three members of the facility's management team, the contractor and the property management company's consultant enjoy the results. For your company's piece of mind, call us at 888-440-3224.